



HiTek Fab
 222 Turner Blvd, St. Peters, MO 63376
 ph (636) 385-6370 www.HiTekFab.com

HT-SAFO



Standard Solid Ankle Foot Orthotic

NOTE: If you don't choose an option, you will receive the **Standard**.

Plastic • Padding

Plastic: 3/16 Thickness is **Standard**
 PolyPro CoPoly HDPE Other Thickness: _____

Full AFO Lining: (Calf pad omitted) 3/16 Thickness is **Standard**
 Aliplast Plastizote No lining Other Thickness: _____

Lining and Pads:
 No Calf Pad **Standard** Calf Pad
 Medial Malleolus Navicular Arch Pad
 Lateral Malleolus Arch Pad
 Padding Color: _____

Straps:
 Tibial Strap Felt pad on anterior strap?* Add instep strap*
Standard Felt pad on instep strap?*

Strap Color: White is **Standard** _____

Transfer Pattern:* _____

Pattern: _____

Trimlines

Rigid Semi Rigid Posterior Leaf Spring


Footplate:

To sulcus Full Footplate PreMet

* Additional Charges

Construction • Features • Options

All measurements should be in mm.

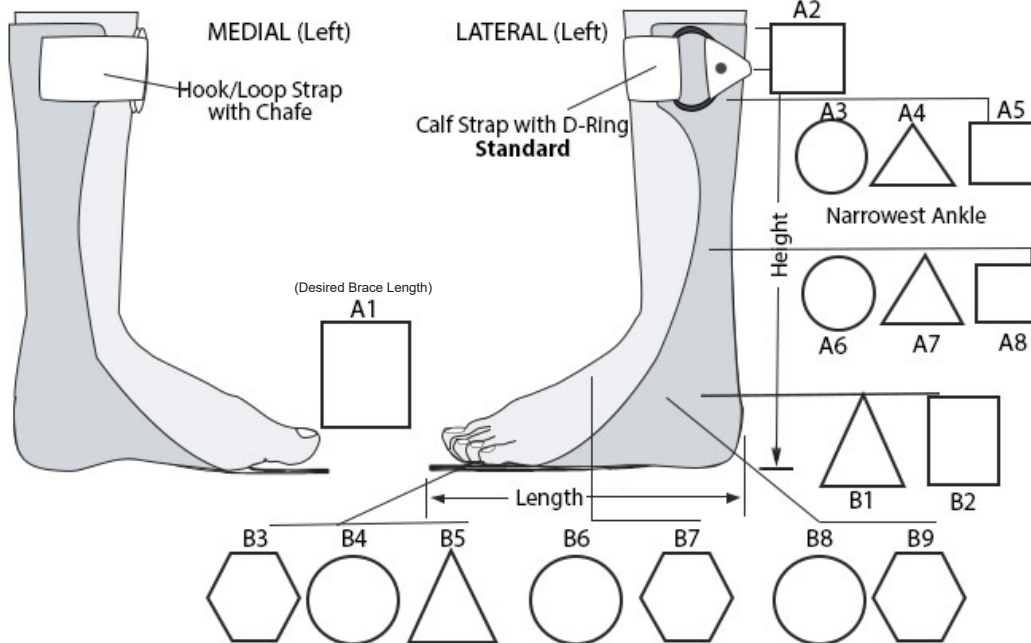

LEGEND

- A1: Brace Length
- A2: Brace Height
- A3: Calf Circumference
- A4: Calf ML
- A5: Calf Height
- A6: Narrowest Ankle Circ.
- A7: Narrowest Ankle ML
- A8: Narrowest Ankle Height
- B1: Ankle ML
- B2: Ankle Height
- B3: 1st MET AP
- B4: 1st MET Circumference
- B5: 1st MET ML
- B6: Mid-Arch Circumference
- B7: Mid-Arch AP
- B8: Diagonal Heel Circ.
- B9: Diagonal Heel AP

□ Length ○ Circumf. △ ML □ AP

Special Instructions

Rush order (adds \$20)

Instructions must not exceed 560 characters. (Could cause error with online submission.)