GEM Specification Sheet

GEM connects to existing prosthetics equipment through a:

- Wrist: 1/2 “ 20mm thread – standardly used in Fillauer, Steeper and Ottobock wrist/lamination units
- Harness: 3/16 “ ball (commonly referred to as the small ball connector)

Static Load Capacities

	Metric (kgs)	Imperial (lbs)
Cable load	50	110
Hand carry load	50	110
Vertical push (press up)	90	198
Finger carry load	50	110
Finger tip side load	10	22
Thumb tip load	36	79
Thumb hinge (crutch force)	30	66

Product Size

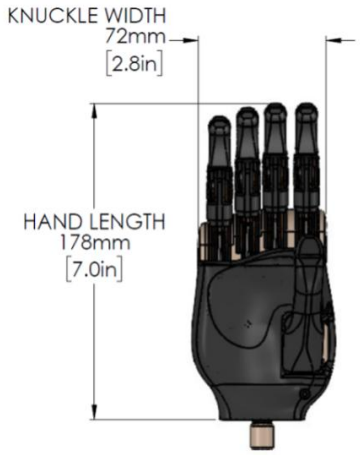

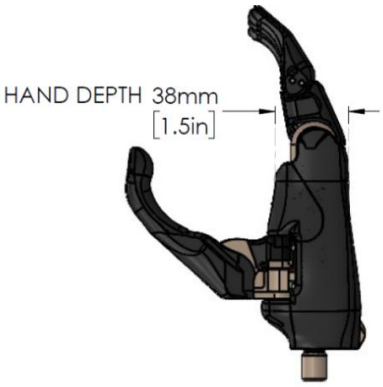

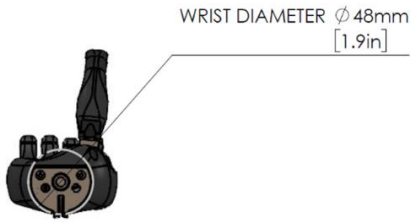

Metacarpal Ltd.
Registration: SC667807
Address: The National Robotarium, Boundary Rd N. Third Gate, Heriot Watt, Edinburgh, UK EH14 4AS
Website: www.metacarpal.co.uk **Email:** info@metacarpal.co.uk