

Go beyond. **Go META.** 



# Now Available!



The Fiberglass META Shock® X delivers the full benefits of the META-Unibody® platform in fiberglass for K3/K4 prosthetic users up to 365 lbs. The split keel design provides users improved stability and ground compliance, enabling conformance and easy adaptation to variations in terrain, while offering a smooth rollover experience. The Fiberglass META Shock X is intended for K3/K4 prosthetic users who are looking for a flexible but durable foot that delivers comfort and high performance without compromising energy return.



# UNIBODY BREAKTHROUGH FOR UNRELENTING PERFORMANCE.

The hardware-free unibody platform of the Fiberglass META Shock X offers durable design with high energy return.


# HIGH COMPLIANCE, HIGH COMFORT.

Fiberglass META Shock® X creates a comfortable experience for the user - 40° axial rotation and vertical shock of the ankle unit reduces torque applied to the residual limb, while the fiberglass unibody platform delivers compliance – allowing for reflexive adaptation and a smooth rollover, conforming to variations in terrain.

# MAXIMUM DISPLACEMENT; MINIMUM BUILD HEIGHT.

Market-leading levels of deflection from the lowest build height in its class provides optimal agility and patient compatibility. The dual-bumper, responsive shock absorption ranges from low, everyday forces to extreme, high magnitude impact for all around protection.

# **META SHOCK FOOT: SPECIFICATIONS**

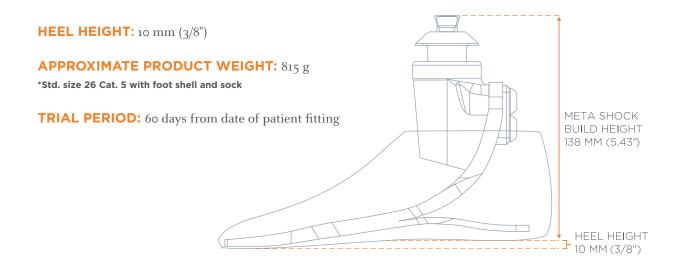

#### FIBERGLASS META SHOCK X CATEGORY CHART Standard (Low to Medium) Impact Level Adjusted User Weight Sizes Sizes Sizes Sizes 22-24 cm 22-24 cm 25-30 cm 25-30 cm (patient body weight + loads carried) 99-115 lbs (45-51 kg) 2 116-130 lbs (52-58 kg) 2 131-150 lbs (59-67 kg) 151-170 lbs (68-76 kg) 3 3 4 4 171-194 lbs (77-87 kg) 195-221 lbs (88-99 kg) 5 6 222-256 lbs (100-115 kg) 257-287 lbs (116-130 kg) 288-324 lbs (131-147 kg) 325-365 lbs (148-165 kg) 9

\*Note: The Standard impact level is recommended for most patients for day-to-day use; high impact level should be chosen for active outdoor users engaged in activities that involve heavy ground impact forces (e.g., sports, construction work)



# **HOW TO ORDER**

Fiberglass META Shock X Foot with Spectra Sock

Sandal Toe Foot Shell

Ordering example: Fiberglass META Shock X Foot, 25 cm, left foot, toe resistance, impact level

Ordering example: Sandal Toe Foot Shell, 25 cm, left foot, tan

M1ø6 - 25L - 2H

FSØ1 - 25LT

Model	Size of Foot	Foot	Toe Resistance	Impact Level	Size of Foot	Foot	Color
M106 = Fiberglass META Shock X Foot	22-30 cm	L = left R = right	1-9 (refer to the Category Chart)	L = Standard H = High (See note below Category Chart)	22-30 cm	L = left R = right	B = Buff T = Tan M = Medium Brown



## The META Lineup

All META feet feature the groundbreaking Meta-Unibody™ design that combines dynamic response with lightweight, hardware-free design suitable for K3-K4 users.



## **META Core**

Smooth rollover and late-stance support for K3-K4 users Low build height and weight.

PDAC APPROVED:

L5981



## **META Arc**

Biomimetic ankle offers stability and adaptation to terrain. 20° of inversion & eversion.

PDAC APPROVED:

L5981 + L5986



## **META Shock**

Adaptive shock absorption via integrated shock module 13 mm of vertical displacement.

PDAC APPROVED:

L5987



## **META Shock X**

Adaptive shock absorption and impact protection via 40° of torsional rotation + 13 mm vertical displacement.

PDAC APPROVED:

L5984 + L5987



#### **Fiberglass META** Shock X

Adaptive shock absorption and impact protection via 40° of torsional rotation + 13 mm vertical displacement with a fiberglass unibody platform.

RECOMMENDED CODING:

L5984 + L5987

FOR MORE INFORMATION CALL 800.848.4930 OR 740.869.3377 OR VISIT WILLOWWOOD.COM











