

## ***Upholstery Material Specifications & Color Chart***

***(Revised June 2014)***

The following Chart is for informational purposes only. Due to scanning, printing and computer monitors, the colors reproduced here may vary significantly from the finished product.

***If the color choice is critical, or you are not familiar with the color being ordered, request a color swatch sample to be sent BEFORE placing an order. There are NO returns accepted due to color variances.***

***For more information on the Esprit Symphony Collection of Vinyl Colors visit:***

***<http://www.symphonycollection.com/Products18.asp?cmd=search>***

**There is no online site for detailed Herculite information. Herculite is the default Upholstery and Mat material for all Mat Platform Tables and Mats.**

### **NOTES:**

**Herculite has discontinued the Red color material and may also discontinue other colors at any time. All Herculite is subject to availability. We apologize for any inconvenience.**

**As of June 2011, all EX- Series Premium Colors are optional, and will carry a surcharge**

***[See our full catalog of products at  
www.baileymfg.com](http://www.baileymfg.com)***

# BAILEY

## STANDARD FABRIC COLOR SELECTOR - SOFT VINYL




### NOTE:

These colors are provided as a guideline and will vary for every printer and monitor.

***If color matching is required please request a sample swatch before ordering!***

## HERCULITE COLORS - REINFORCED VINYL

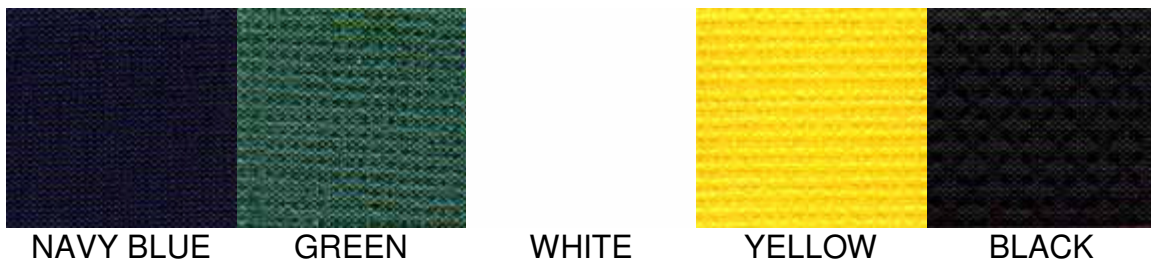


### NOTE:

Herculite material and colors are subject to availability and may change or become unavailable at any time.

***Check for current stock before ordering if Herculite is a requirement for your Mat or Mat Table!***

BAILEY MANUFACTURING COMPANY  
118 LEE STREET  
PO BOX 130  
LODI, OH 44254  
www.baileymfg.com

1-800-321-8372 (USA)  
FAX: 1-800-224-5390 (USA)  
330-948-1080  
FAX: 330-948-4439  
email: baileymfg@baileymfg.com

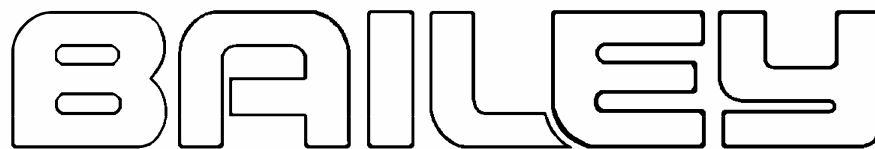

# NASSIMI



**ESPRIT** colors are part of the Team Performance line of premium vinyl fabrics. They are manufactured to meet the following standards:

## PERFORMANCE SPECIFICATIONS

**Abrasion Resistance:** 100,000+ Double Rubs per ASTM D 4157-92 Wyzenbeek / CFFA-1A  
**Mildew Resistant:** ASTM G21-96 / CFFA-120  
**Anti Bacterial:** AATCC 147 / CFFA300  
**Anti Microbial:** ASTM G21 / CFFA 120  
**Ultra Violet Resistant:** 1000 Hours ASTM G26-96 Method C / CFFA-2  
**Cold Crack:** -20° F Federal Standard No. 191A-Method 5874 / CFFA-6  
**Stain Resistant:** ResilienceSR Protection  
**Sulfide Stain Resistant**

## FLAMMABILITY\* REQUIREMENTS

California Fire Code  
Technical Bulletin No. 117, Section E  
BIFMA  
UFAC Class 1  
MVSS 302  
NFPA 260  
IMO A.652 (16) 8.2  
IMO A.652 (16) 8.3  
May Comply with California 133 when Tested with Suitable Components  
Can be Treated to Pass FAA 25.853

**Resilience SR** represents the latest Vinyl Protection:

**Stain Resistance:** With proper care, vinyl can be easily cleaned and will guard against stains.  
**Anti-Microbial & Anti-Bacterial Protection:** Inhibits bacterial growth, as well as fungus, mold and mildew spores.  
**Abrasion Resistance:** Provides additional wear properties and surface durability, increasing the life of the material.  
Resilience SR is not visible, and does not affect the feel of the material. Resilience SR will resist repeated cleaning and wear.

Resilience SR complies with ASTM G 21 / CFFA 120 and AATCC 147 / CFFA 300 and inhibits the growth of the following:

Aspergillus Niger  
Chaetomium Globosum  
Aureobasidium Pullulans

Staphylococcus Aureus  
Salmonella Choleraesuis

Penicillium Pinophilum  
Trichoderma Virens

Klebsiella Pneumoniae  
Pseudomonas Aeruginosa

The information in this guide refers to performance of Resilience in tests conducted under laboratory conditions. This information does not imply a specific guarantee and does not relieve the user from the responsibility of the proper and safe use of the product and referenced cleaning agents.

## HERCULITE®

### Brand Fabric

#20 and #80 laminated and reinforced fabrics are manufactured to Military Specifications to be Abrasion resistant, Mildew/Rot Resistant and Flame Retardant\* per the following standards and testing methods:

Quality Standard MIL-C-43006  
Federal Fire Standard 191-5903

\*The terms Flammability, Fire Retardant and any corresponding data refer to typical performance in the specific tests indicated, and should not be construed to imply the behavior of this or any other material under actual fire conditions.

BAILEY MANUFACTURING COMPANY  
118 LEE STREET  
PO BOX 130  
LODI, OH 44254  
www.baileymfg.com

1-800-321-8372 (USA)  
FAX: 1-800-224-5390 (USA)  
330-948-1080  
FAX: 330-948-4439  
email: baileymfg@baileymfg.com