




Knee Joints



Lotus Adapter

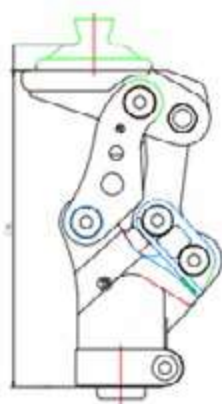

1324

STANCE FLEXION 5-BAR MECHANICAL KNEE

- Very stable 5-bar knee with up to 12 degrees of stance flexion for maximum safety during stance
- Optional Adapters: Pyramid (AK) and Lotus (KD)
- Can be used for either above knee or knee disarticulation
- All axes have built-in bearing which allow for ultra smooth walking movement
- Extensive alignment adjusting abilities for a smooth and natural gait pattern
- Best suited to be used for **K2 level**
- Practitioner adjustable from high to low stability stance flexion
- Proximal attachment has 2mm of A/P, M/L slide and rotation adjustment
- Up to 12 degrees of stance flexion
- The frame construction is made of superlight aluminum alloy and the 5-bar linkage is made of aircraft alloy

PDAC approved HCPCS code(s)

- **L5611 + L5845 + L5850**
- To download PDAC Letter please visit our website at www.stngco.com

BILLING LEVEL **K1** **K2** K3 K4

P/N	1324AP Pyramid Adapter	1324AL Lotus Adapter
Weight Limit	125kg / 275lbs	125kg / 275lbs
Build Height	112mm	118.3mm
Knee Center to Mid Dome	23.5mm	29.8mm
Knee Flexion	135 Degrees	135 Degrees
Product Weight	789g	801g
Material	Aluminum	Aluminum
Warranty	2 years	2 years

REPLACEMENT PARTS

P/N	Description
PA13	Pyramid Adapter for : L1321, 1321,1322,1323,1324, L1324 and 1326
LA13	Lotus Adapter for : L1321, 1321,1322,1323,1324, L1324 and 1326

Torque Value	Torque (Nm)	Hex (mm)
M6 Cap Screw (Tube Clamp Torque Setting)	12 Nm	5mm wrench
M10 Bolt (Pyramid Center Bolt)	18 Nm	8mm wrench