


## OVERLAY TF

To determine the correct size, the measurement protocol starts by identifying the suspension type, followed by measuring the limb length and circumference at a specific height.

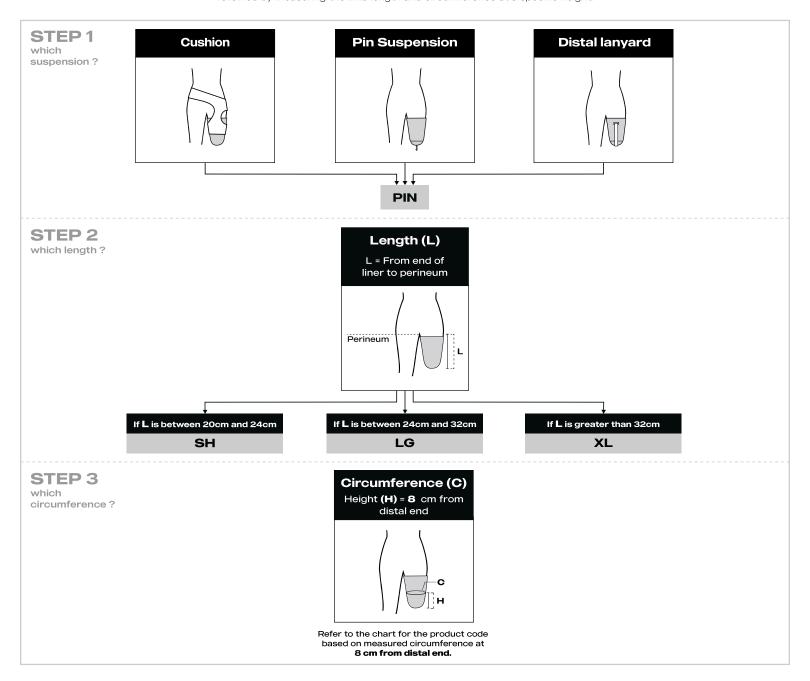

Suspension	Length	Circumference	Code
Distal Locking + Lanyard +Cushion	20-24 cm	32-36 cm	OVTF-32-SH-PIN
		36-40 cm	OVTF-38-SH-PIN
		40-45 cm	OVTF-40-SH-PIN
		45-48 cm	OVTF-44-SH-PIN
		48-52 cm	OVTF-48-SH-PIN
		52-62 cm	OVTF-52-SH-PIN
	24-32 cm	32-36 cm	OVTF-32-LG-PIN
		36-40 cm	OVTF-38-LG-PIN
		40-45 cm	OVTF-40-LG-PIN
		45-48 cm	OVTF-44-LG-PIN
		48-52 cm	OVTF-48-LG-PIN
		52-62 cm	OVTF-52-LG-PIN

Suspension	Length	Circumference	Code
Distal Locking + Lanyard +Cushion	+32 cm	32-36 cm	OVTF-32-XL-PIN
		36-40 cm	OVTF-38-XL-PIN
		40-45 cm	OVTF-40-XL-PIN
		45-48 cm	OVTF-44-XL-PIN
		48-52 cm	OVTF-48-XL-PIN
		52-62 cm	OVTF-52-XL-PIN

Please see next page for


Vacuum suspensions —







To determine the correct size, the measurement protocol starts by identifying the suspension type, followed by measuring the limb length and circumference on top of the seal.

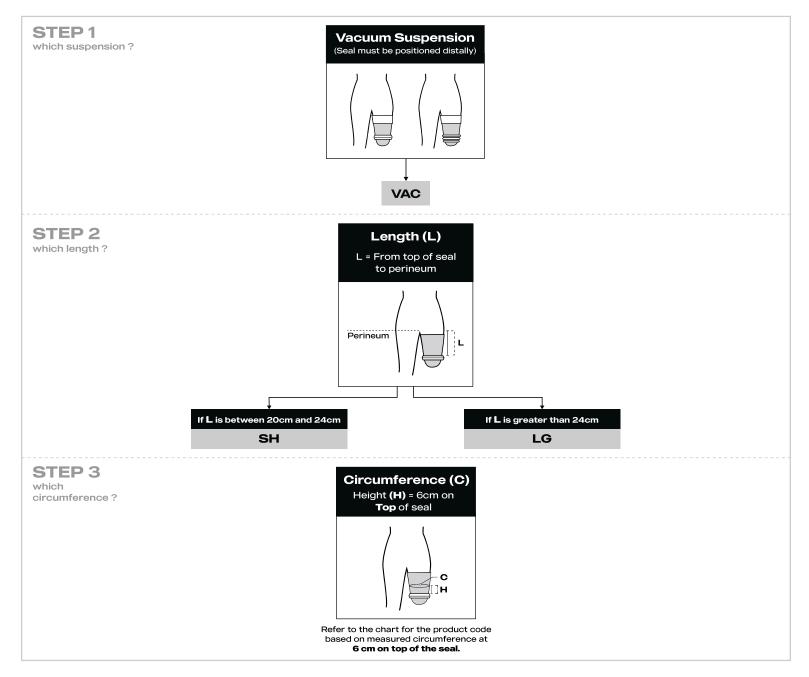

Suspension	Length	Circumference	Code
	20-24cm	32-38 cm	OVTF-32-SH-VAC
		38-42 cm	OVTF-38-SH-VAC
		42-47 cm	OVTF-40-SH-VAC
		47-50 cm	OVTF-44-SH-VAC
		50-54 cm	OVTF-48-SH-VAC
Vacuum Suspension		54-62 cm	OVTF-52-SH-VAC
(Distally Positioned Seal)	+24 cm	32-38 cm	OVTF-32-LG-VAC
		38-42 cm	OVTF-38-LG-VAC
		42-47 cm	OVTF-40-LG-VAC
		47-50 cm	OVTF-44-LG-VAC
		50-54 cm	OVTF-48-LG-VAC
		54-62 cm	OVTF-52-LG-VAC

Please see next page for

Other suspensions