

DuraShock



Specifications

Weight limit: 220 lbs. (100 kg)

Weight limit HD: 250 lbs. (113 kg)


Axial rotation: 60° of axial rotation
(30° in each direction)

Pylon Diameter: 30 mm

HD Pylon Diameter: 34 mm

Product Features

- Vertical shock absorption
- Reduces rotational force to residual limb
- 4 stiffness options matched to weight/activity
- Maintenance free
- Includes dampening ring and cosmetic sleeve
- Water resistant

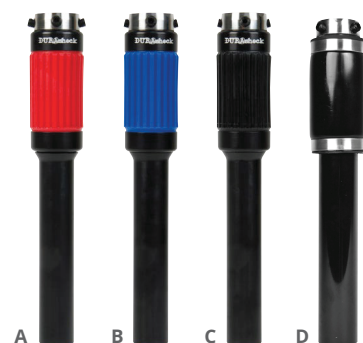

U.S. Patent No. 6468315 & 6682569

Ordering Information

DuraShock Long Pylon

	Color	Moderate Activity Level	High Activity	Build Height	Weight	Product Number
A	Red	< 144 lbs. (65 kg)	< 139 lbs. (63 kg)	5.8 – 11.3 in. (146 – 286 mm)	15 oz. (428 g)	DS003L
B	Blue	145 – 179 lbs. (68 – 81 kg)	140 – 169 lbs. (64 – 76 kg)	5.8 – 11.3 in. (146 – 286 mm)	15 oz. (428 g)	DS002L
C	Black	180 – 220 lbs. (82 – 100 kg)	170 – 200 lbs. (77 – 91 kg)	5.8 – 11.3 in. (146 – 286 mm)	15 oz. (428 g)	DS001L
D	HD	220 – 250 lbs. (100 – 113 kg)	200 – 250 lbs. (91 – 113 kg)	6.8 – 11.3 in. (171 – 286 mm)	21.7 oz. (609 g)	DS004L



U.S. Patent No. 6468315 & 6682569

DuraShock Short Pylon

	Color	Moderate Activity Level	High Activity	Build Height	Weight	Product Number
E	Red	< 144 lbs. (65 kg)	< 139 lbs. (63 kg)	4.8 – 7.5 in. (114 – 190 mm)	11 oz. (318 g)	DS003S
F	Blue	145 – 179 lbs. (68 – 81 kg)	140 – 169 lbs. (64 – 76 kg)	4.8 – 7.5 in. (114 – 190 mm)	11 oz. (318 g)	DS002S
G	Black	180 – 220 lbs. (82 – 100 kg)	170 – 200 lbs. (77 – 91 kg)	4.8 – 7.5 in. (114 – 190 mm)	11 oz. (318 g)	DS001S
H	HD	220 – 250 lbs. (100 – 113 kg)	200 – 250 lbs. (91 – 113 kg)	5 – 7.5 in. (127 – 190 mm)	15.2 oz. (425 g)	DS004S

Replacement Parts

128265 – Dampening Ring, 30 mm and 34 mm

DS009A – Alignment Adjustment Screw, 5/16-24, Stainless Steel

NOTE: Weights are a suggested guide for torque and shock performance. Individual preference and performance will vary. The dampening ring included with each pylon is used to reduce the amount of rotation and vertical compression.

DuraShock with Tube Clamp



Specifications

Weight limit: 220 lbs. (100 kg)

Product weight: 11.6 oz. (330 g)

Durability: Meets ISO 10328



Ordering Information

U.S. Patent No. 6468315 & 6682569

Color	Moderate Activity Level	High Activity Level	Build Height	Weight	Product Number
Red	< 144 lbs. (65 kg)	144 lbs. (65 kg)	6 in. (152 mm)	11.6 oz. (330 g)	DS003SC
Blue	145 – 179 lbs. (66 – 81 kg)	140 – 169 lbs. (64 – 77 kg)	6 in. (152 mm)	11.6 oz. (330 g)	DS002SC
Black	180 – 220 lbs. (82 – 100 kg)	170 – 200 lbs. (77-91 kg)	6 in. (152 mm)	11.6 oz. (330 g)	DS001SC

NOTE: Weights are a suggested guide for torque and shock performance. Individual preference and performance will vary. The dampening ring included with each pylon is used to reduce the amount of rotation and vertical compression.

DuraShock Short



Specifications

Weight limit: 275 lbs. (125 kg)

Weight limit HD: 300 lbs. (136 kg)

Product weight: 11.6 oz. (330 g)

Durability: Meets ISO 10328



Ordering Information

U.S. Patent No. 6468315 & 6682569

Color	Moderate Activity Level	High Activity Level	Build Height	Weight	Product Number
Red	< 144 lbs. (65 kg)	144 lbs. (65 kg)	3.5 in. (89 mm)	10.6 oz. (300 g)	DS003SS
Blue	145 – 179 lbs. (66 – 81 kg)	140 – 169 lbs. (64 – 76 kg)	3.5 in. (89 mm)	10.6 oz. (300 g)	DS002SS
Black	180 – 220 lbs. (82 – 100 kg)	170 – 200 lbs. (77 – 91 kg)	3.5 in. (89 mm)	10.6 oz. (300 g)	DS001SS
HD	220 – 300 lbs. (100 -136 kg)	200 – 250 lbs. (91 – 113 kg)	4.3 in. (108 mm)	16.2 oz. (460 g)	DS004SS

NOTE: Weights are a suggested guide for torque and shock performance. Individual preference and performance will vary. The dampening ring included with each pylon is used to reduce the amount of rotation and vertical compression.