


Knees



Endurance Hydraulic 160 Knee System

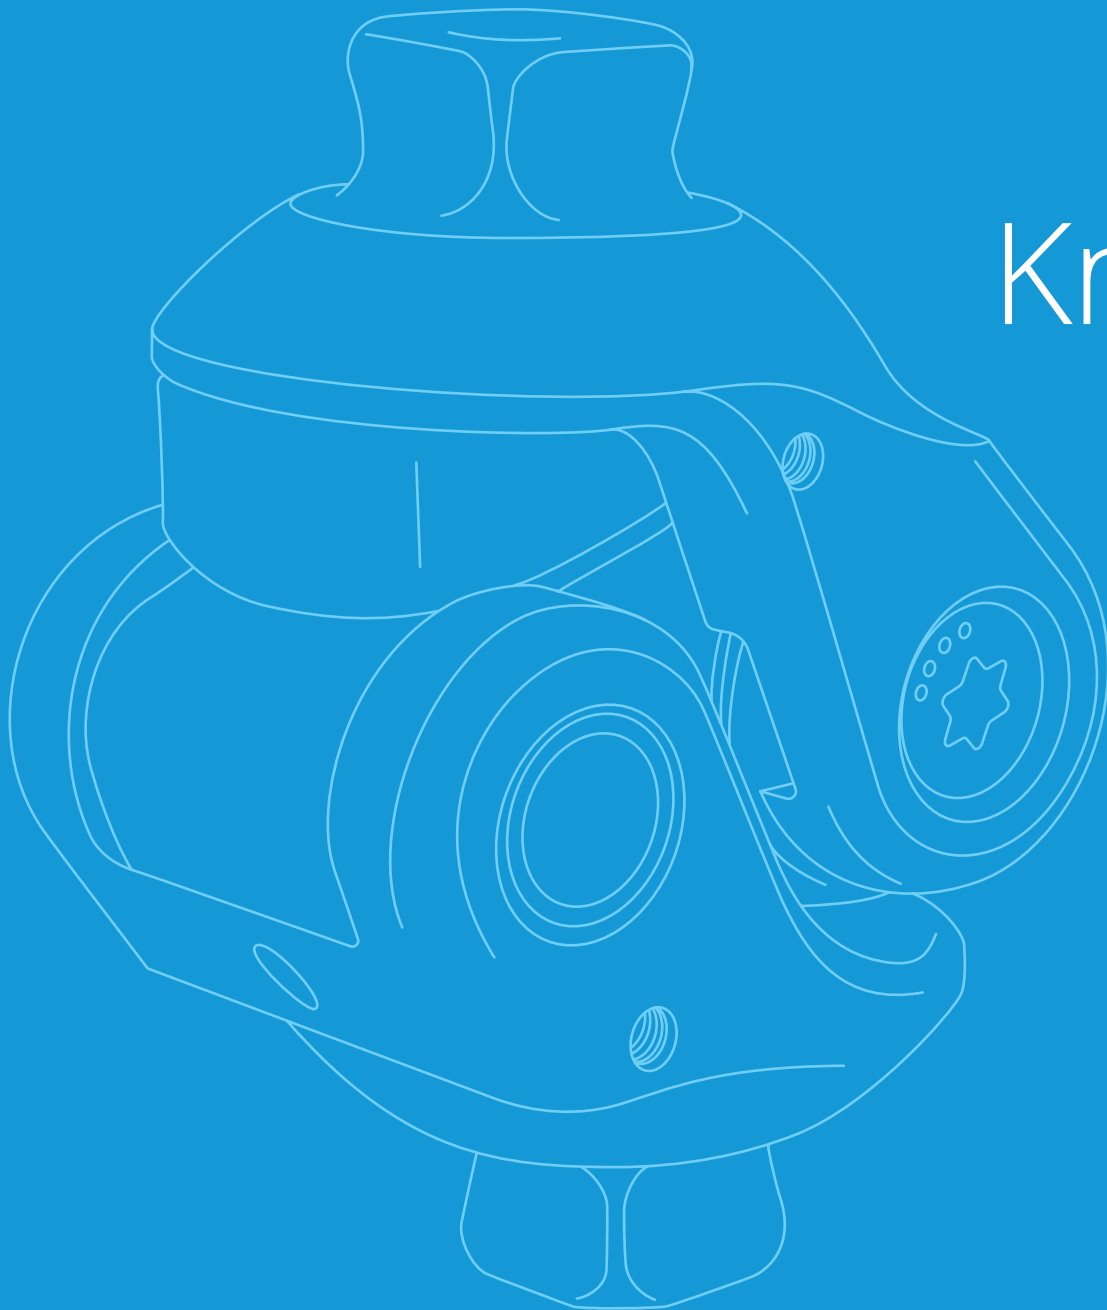

K3

TF

Specifications

Weight limit: 300 lbs. (136 kg)

Product weight: 2.5 lbs. (1134 g)

Flexion: 110°

Product Features

- Shorter 160 mm hydraulic unit
- Swing and stance hydraulic control
- A-P stability adjustment
- Standard stance phase hydraulic control
- Adjustable yield rate
- Proximal attachments sold separately (each)



Ordering Information

Description	Product Number
Endurance 160 Knee System	62041

Replacement Parts

62042 – Endurance 160 Hydraulic Unit

62206 – Mounting Kit (Not Pictured)

62122 – Endurance 160 Knee Frame, with Proximal Adjustment Screw

62208 – Knee Cap



Description	Product Number
Mounting Kit for Ossur Gaitmaster Low Profile and Other 160 Size Frames	62206

Attachment Choices

Description	Product Number
Pyramid Receiver, Female Dovetail, Lock Screws	62202
Threaded Adapter, Female Dovetail, Lock Screws	62203
4-Hole Plate, Female Dovetail, Lock Screws	62204
Pyramid, Female Dovetail, Lock Screws	62205
4-Hole Pyramid Adapter, with Through Hole, Titanium, Lock Screws	60254
4-Hole Pyramid Adapter, Stainless Steel, Lock Screws	60416



62202



62203



62204



62205



60254



60416

Hydraulic Control



TF

Product Features

- Designed to emulate natural gait
- Programs flexion and extension through specially engineered ports
- Automatic adjustment for cadence, correct heel rise, and terminal impact
- Also available for knee disarticulation setups
- Independently adjustable flexion and extension resistance



Ordering Information

Description	Product Number
Dupaco Control	52211
Dupaco Control, Multiplex (Fits Entegra Frame)	70465

Lite Phase Hydraulic Control



TF

Product Features

- Reprogrammed with less resistance than standard Dupaco
- Independently adjustable flexion and extension resistance
- Ideal for the newer, lightweight modular prostheses
- Compatible with exoskeletal systems



Ordering Information

Description	Product Number
Lite Phase Dupaco, Multiplex (Fits Entegra Frame)	59797
Lite Phase Dupaco	60030

Spectrum EX 4-Bar Pneumatic Knee



K3 TF

Specifications


Weight limit: 300 lbs

Product weight: 28 oz. (794 g)

Flexion: 160°

Product Features

- Improves patient control through link geometry
- Adjustable knee stability
- Easy “glide-flex” action
- Choice of proximal attachments (one required)
- Enhanced pneumatic control system
- Four easily interchangeable springs provide adjustable extension assist

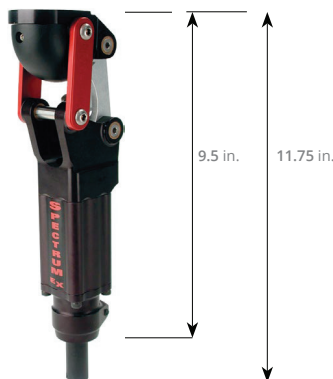

Ordering Information

Description	Above Knee Center	Overall Above Knee Center	Weight	Product Number
Spectrum 4-Bar Pneumatic Knee	5/16 in. (14 mm)	5/16 in. (14 mm)	28 oz. (794 g)	61245
Knee Pad	–	–	–	61240
Knee Pad Screw	–	–	–	61242
Side Knee Pad Screws (2 Each)	–	–	–	61243

Proximal Adapter Components

Description	Above Knee Center	Overall Above Knee Center	Weight	Product Number
Pyramid Adapter, with Bolt	3/16 in. (20 mm)	1 5/16 in. (26 mm)	1.5 oz. (42 g)	61338
Bolt, M10 × 40 mm	–	–	–	58607
Slide Adapter, with Bolt	3/16 in. (20 mm)	1 1/8 in. (26 mm)	2.1 oz. (60 g)	61337
Bolt, M10 × 28 mm	–	–	–	61570
Threaded Adapter, with Bolt	7/8 in. (22 mm)	1 1/16 in. (25 mm)	1.7 oz. (50 g)	61341
Bolt, M10 × 35 mm	–	–	–	61339
4-Hole Adapter, with Bolt	7/8 in. (22 mm)	7/8 in. (22 mm)	1.9 oz. (56 g)	61336
Bolt, M10 × 25 mm	–	–	–	61246



61336



61341



61338



61337

W.A.L.K. (Weight Activated Locking Knee)




Specifications

Weight limit: Titanium – 300 lbs. (136 kg)
Aluminum – 220 lbs. (100 kg)

Product weight: Titanium – 12 oz. (350g)
Aluminium – 11.4 oz. (316g)

Build height: 2 in. (51 mm)

Flexion: 145°

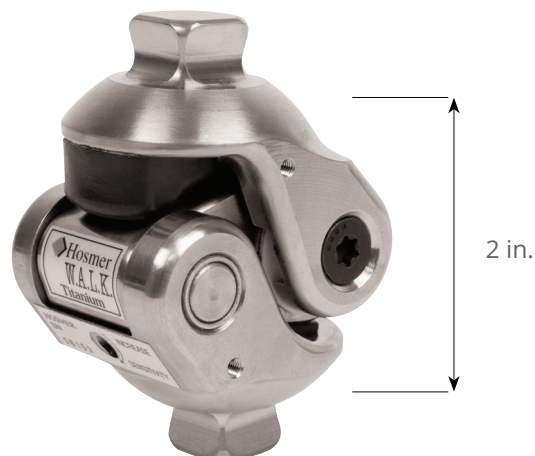

Product Features

- Brakes on weight bearing for extra degree of stability
- Independent friction and stabilizing sensitivity adjustments
- Includes patella cover and adjustable extension assist

Ordering Information

Description	Product Number
W.A.L.K. Titanium	60794
W.A.L.K. Aluminum	60785

Components for W.A.L.K.

Description	Product Number
Extension Assist Kit	60825
Patella	60709

S.A.F.K. (Single Axis Friction Knee)



Specifications

Weight limit: Titanium – 300 lbs. (136 kg)
Aluminum – 220 lbs. (100 kg)

Product weight: Titanium – 12 oz. (350g)
Aluminium – 11.4 oz. (316g)

Build height: 2 in. (51 mm)

Flexion: 145°



Product Features

- Adjustable constant friction
- Includes patella cover and adjustable extension assist

Ordering Information

Description	Product Number
S.A.F.K. Titanium	60821
S.A.F.K. Aluminum	60823

Components for S.A.F.K.

Description	Product Number
Extension Assist Kit	60825
Patella	60709

S.A.L.K. (Single Axis Locking Knee)



Specifications

Weight limit: 300 lbs. (136 kg)

Product weight: 9.3 oz. (264g)

Build height: 3.25 in. (82 mm)

Flexion: 135°

Product Features

- Locks in extension
- Includes patella cover



Ordering Information

Description	Product Number
S.A.L.K. Aluminum	60471

Components for S.A.L.K.

Description	Product Number
Lock Release Assembly	60847
Cable Assembly	61088
Cable Housing Anchor	50427
Cable Housing	56191
Sheath, Knee	60475

MightyMite® 4-Bar Knee



- K2
- K3
- K4
- TF

Specifications

Weight limit: 132 lbs. (60 kg)
Product weight: 9.1 oz. (257.9 g)
Material: Aluminum

Product Features

- Adjustable extension assist
- Adjustable friction
- Multiple attachment option



FC100510

FC100500

Ordering Information

Description	Product Number
4-Bar Knee, includes Pyramid Adapter	FC100510
4-Bar Knee, without Proximal Attachment	FC100500

See additional information about MightyMite 4-Bar Knee on page 95.

MightyMite® 4-Bar Knee Proximal Attachments



- TF

Specifications

Weight limit: 132 lbs. (60 kg)

Ordering Information

Description	Material	Product Number
Pyramid Adapter	Titanium	FC100501
Slide Adapter	Aluminum	FC100502
4-Hole Adapter	Aluminum	FC100503
Threaded Adapter	Aluminum	FC100504
4-Hole Plate with Male Dovetail	Aluminum	FC100505



FC100501



FC100502



FC100503



FC100504



FC100505