

## Knee Joints



### L1324

#### STANCE FLEXION 5-BAR MECHANICAL KNEE WITH MANUAL LOCK

- Very stable 5-bar knee with up to 12 degrees of stance flexion for maximum safety during stance
- Constant friction adjustment for swing phase
- Practitioner adjustable from high to low stability stance flexion
- Proximal attachment has 2mm of A/P, M/L slide and rotation adjustment
- Up to 12 degrees of stance flexion
- Lock mechanism can also be disabled at a later time to provide free swing knee function
- Best suited to be used for **K1/K2 Level**
- The frame construction is made of superlight aluminum alloy and the 5-bar linkage is made of aircraft alloy


#### PDAC approved HCPCS code(s)

- **L5611 + L5845 + L5850 + L5925**
- To download PDAC Letter please visit our website at [www.stngco.com](http://www.stngco.com)

BILLING LEVEL **K1** **K2** **K3** **K4**



Lotus Adapter

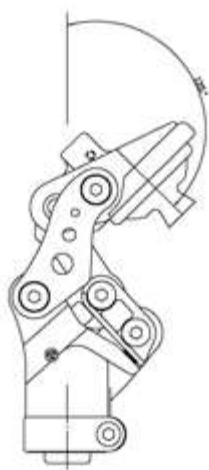

P/N	1324AP Pyramid Adapter	1324AL Lotus Adapter
<b>Weight Limit</b>	125kg / 275lbs	125kg / 275lbs
<b>Build Height</b>	112mm	118.3mm
<b>Knee Center to Mid Dome</b>	23.5mm	29.8mm
<b>Knee Flexion</b>	135 Degrees	135 Degrees
<b>Product Weight</b>	848g	861g
<b>Material</b>	Aluminum	Aluminum
<b>Warranty</b>	2 years	2 years

#### REPLACEMENT PARTS

P/N	Description
PA13	Pyramid Adapter for : L1321, 1321,1322,1323,1324, L1324 and 1326
LA13	Lotus Adapter for : L1321, 1321,1322,1323,1324, L1324 and 1326
LY13	Lanyard for Manual Locking Knee

Torque Value	Torque (Nm)	Hex (mm)
M6 Cap Screw (Tube Clamp Torque Setting)	12 Nm	5mm wrench
M10 Bolt (Pyramid Center Bolt)	18 Nm	8mm wrench