



OP4 KNEE™

Pneumatic monocentric knee joint
with weight activated brake

USER PROFILE:

- Transfemoral amputation
- K-Levels 2 and 3
- Maximum user weight 220 lb / 100 kg

KEY FEATURES:

- Lightweight 680 grams
- Finely adjustable brake unit
- Flexion and extension can be set independently
- Large flexion range 0° to 145°

OP4 KNEE™

KEY FEATURES:



Adaptable swing phase



Large 145° flexion range



Adjustable brake




Knee protection cap

TECHNICAL INFORMATION:

Material	Aluminium
Amputation level	Transfemoral
Overall fitted height (1)	Approx. 198 mm
Effective fitted height (2)	Approx. 146 mm
Fitted height (3)	Approx. 26 mm
Weight	Approx. 680 g
Proximal connection	Pyramid
Distal connection	Integrated 30 mm tube clamp
Swing phase	Pneumatic
Stance phase	Adjustable geometry, brake and stance flexion
Axis	Monocentric
Flexion range	0°–145°

SUGGESTED BILLING CODES*
L5822, L5845 & L5850

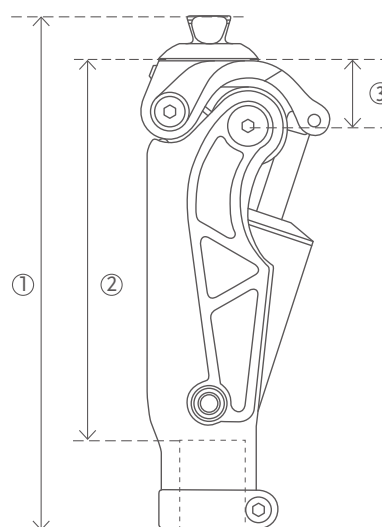

PRODUCT INFORMATION

Part#	Description
1 720 185	OP4 Knee

*The responsibility for accurate coding lies solely with the provider treating the patient. Össur assumes no responsibility or liability for the provider's coding decisions. Össur's coding suggestions rest on its best judgment and are subject to revision.

FOLLOW ÖSSUR ON



TEL (800) 233-6263
CANADA (800) 663-5982
WWW.OSSUR.COM

