

# FLEX-FOOT CHEETAH® XTEND WITH NIKE SPIKE PAD



Kick into high gear with a responsive and comfortable ride from start to finish.

The Cheetah Xtend is the perfect companion for longer sprints and short-distance running (400-5000m). This highly effective carbon fiber blade has a continuous curve toward the toe offering a smooth rollover. The longer, flatter toe enhances push off, while the plantar flexed pylon supports better forward progression.

The Nike Spike Pad has been designed exclusively for the Cheetah. It provides specialized traction that has been optimized for the blade.

A new alignment adapter for the Cheetah is now available for quicker set up and easier alignment off the blade.



USER INFORMATION	
Amputation Level:	Transfemoral and Transtibial
Impact Level:	Extreme
Maximum Patient Weight:	147kg (325lbs)



FOOT INFORMATION	
Categories:	1-9
Sizes:	One Size Per Category
Weight of Foot:	750g (26.4oz)
Max Build Height:	451mm (17 3/4")
Min Build Height:	330mm (13")
Adapter Options:	Lamination Connector

Note: Build height is from bottom of foot to center of lower bolt hole of lamination plate.

## CATEGORY SELECTION CHART


WEIGHT KG	45-52	53-59	60-68	69-77	78-88	89-100	101-116	117-130	131-147
WEIGHT LBS	97-115	116-130	131-150	151-170	171-194	195-220	221-256	257-287	288-325
Extreme Impact Level	1	2	3	4	5	6	7	8	9



# FLEX-FOOT® CHEETAH® XTEND WITH NIKE SPIKE PAD

## CLEARANCE

WITH LAMINATION CONNECTOR

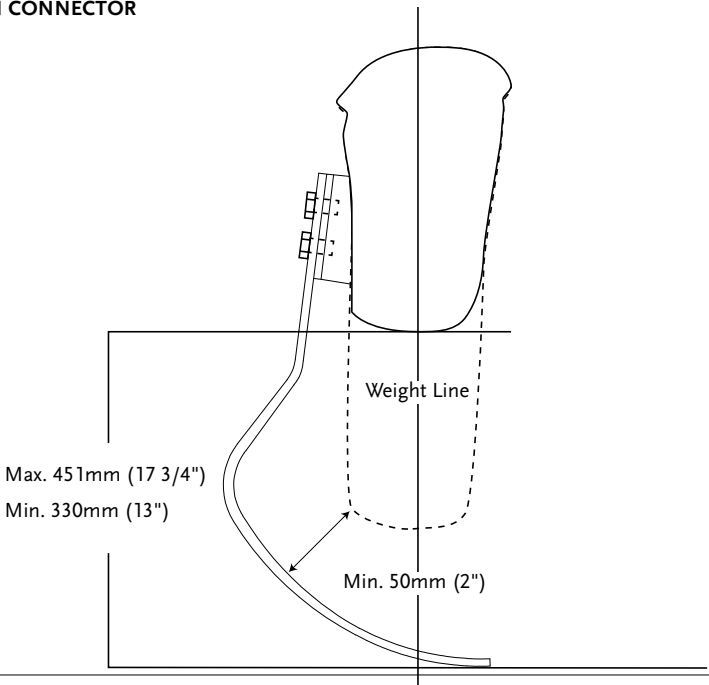

## KITS


### CHEETAH XTEND KIT

PART# CATEGORY(1-9)

FSX006

- Includes:
- Cheetah Xtend Blade
  - Nike Spike Pad Kit

Note: Cheetah Xtend is excluded from the trial period.



### NIKE SPIKE PAD KIT

PART#	DESCRIPTION	CAT.
FSX50008	Nike Spike Pad	1-9

- Includes:
- Nike Spike Pad
  - 7mm (9/32") Pyramid Spikes
  - Wrench

Note: Nike Spike Pad has same spikes as Nike track and field shoes, additional spikes can be purchased at Nike.



# FLEX-FOOT® Cheetah® XTEND WITH NIKE SPIKE PAD


## KITS

### LAMINATION CONNECTOR KIT

PART#	DESCRIPTION	CAT.
FSX50009	Lamination Connector	1-9

Includes:

- Connector
- Alignment Wedges (2°, 4°, 6°, 8°)
- Attachment Hardware
- Lamination Kit




### HARDWARE KIT FOR T CONNECTORS

PART#	LENGTH	WEIGHT	SIZE	CAT.
CM100055	10mm	3/8"	144g 5oz	x 2-1/2" 1-9


Includes:

- Bolts
- Nuts
- Spherical Washer
- Flat Washer




### ALIGNMENT ADAPTER KIT

PART#	DESCRIPTION	CAT.
FSX50007	Alignment Adapter	ALL



PART#	DESCRIPTION	SIZE	CAT.
CM130211	Attachment Bolt for Lamination Connector	3/8"-24 x 1 1/2"	1-9
CM130213	Attachment Bolt for Lamination Connector	3/8"-24 x 1 3/4"	1-9
CM130214	Attachment Bolt for Lamination Connector	3/8"-24 x 1 3/8"	1-9



PART#	DESCRIPTION	CAT.
CM140515	Alignment Wedges 2°	ALL
CM140516	Alignment Wedges 4°	ALL
CM140517	Alignment Wedges 6°	ALL
CM140518	Alignment Wedges 8°	ALL

